




QSFP28 100G

Overview

Integra Optics' QSFP28 transceivers are designed in accordance to industry standards and are available in a variety of power budgets and data rate options. Integra QSFP28 transceivers are coded to be 100% OEM compatible and are more than capable of significantly growing network capacity to levels far beyond that of previous generation optical transceivers.

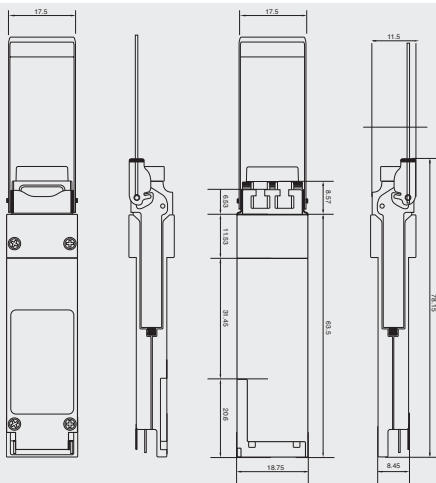

Features

- ➔ Dual Rate Operation 103/112Gbps
- ➔ Link Distance Ranging from 100m to 40km
- ➔ MM or SM Fiber
- ➔ Commercial Temperature Ranges
- ➔ Digital Diagnostics Monitoring Support
- ➔ IEEE 802.3ba LWDM
- ➔ QSFP28 MSA Compliant

Applications

- ➔ 100GBase-SR4
- ➔ 100GBase-CWDM4
- ➔ 100GBase-LR4
- ➔ 100GBase-ER4
- ➔ OTN - OTU4

Product Specifications

Integra Part Number	Wavelegnth	Distance	Budget	TX (dbm) Min/Max	RX (dbm) Min/Max	Interface	Description
QSFP28-SR4	850	100m	4.3	-6/2.5	2.4/-10.3	MPO/OM4	QSFP28-100GBase-SR4
QSFP28-CWDM4	1310 ¹	2km	5.0	-6.5/4.5	2.5/-11.5	LC/SMF	QSFP28-100GBase-CWDM4
QSFP28-LR4	1310 ²	10km	6	-4.3/4.5	4.5/-10.3	LC/SMF	QSFP28-100GBase-LR4
QSFP28-ER4L	1310 ³	40km	16	-2.5/6.5	-3.5/-18.5	LC/SMF	QSFP28-100GBase-ER4

*Note 1: Typical output value is -1dBm, giving a typical Power Budget of at least 13.4dB.

*Note 2: Typical output value is -1dBm, giving a typical Power Budget of at least 14.8dB.

*Note 3: 4 Lane: 1295.56, 1300.05, 1304.58, 1309.14

Did You Know?

You can ensure coding accuracy and eliminate time spent finding replacement optics when you choose Integra transceivers. Our Smart Coder allows technicians to reconfigure our transceivers for specific hardware right in the field.

QSFP28-SR4

Detailed Specifications

Parameter	Minimum	Typical	Maximum	Unit
Storage Temperature (Ts)	-40	-	85	°C
Operating Case Temperature CTemp (Tc)	0	-	70	°C
Wattage	-	-	3.6729	W
Power Supply Voltage (Vcc)	3.135	3.3	3.465	V
Power Supply Current (Icc)	-	-	1060	mA

Transmitter

Parameter	Minimum	Typical	Maximum	Unit
Center Wavelength (λ_C)	840	850	860	nm
Data Rate, per Lane	-	25.78	-	Gbps
ORL Tolerance	-	-	12	dB
Average Output Power (Pout, AVG)	-6	-	2.4	dBm
Extinction Ratio (ER)	3.0	-	-	dB

Receiver

Parameter	Minimum	Typical	Maximum	Unit
Center Wavelength (λ_C)	840	850	860	nm
Receive Overload(PMAX)	2.4	-	-	dBm
Receive Sensitivity (PMIN)	-	-	-10.3	dBm

QSFP28-CWDM4

Detailed Specifications

Parameter	Minimum	Typical	Maximum	Unit
Storage Temperature (Ts)	-40	-	85	°C
Operating Case Temperature CTemp (Tc)	0	25	70	°C
Wattage	-	-	3.6729	W
Power Supply Voltage (Vcc)	3.315	3.3	3.465	V
Power Supply Current (Icc)	-	-	1060	mA

Transmitter

Parameter	Minimum	Typical	Maximum	Unit
Lane 0 Center Wavelength (λC0)	1264.50	-	1277.50	nm
Lane 1 Center Wavelength (λC1)	1284.50	-	1297.50	nm
Lane 2 Center Wavelength (λC2)	1304.50	-	1317.50	nm
Lane 3 Center Wavelength (λC3)	1324.50	-	1337.50	nm
Data Rate, per Lane	-	25.78	-	Gbps
Total Average Launch Power (PT)	-	-	8.5	dBm
Average Output Power per Lane (PAVG)	-6.5	-	2.5	dBm
Extinction Ratio (ER)	3.5	-	-	dB
Side Mode Suppression Ratio (SMSR)	30	-	-	dB
Optical Modulation Amplitude (POMA)	-4.0	-	2.5	dBm
Optical Return Loss Tolerance	-	-	20	dB

Receiver

Parameter	Minimum	Typical	Maximum	Unit
Lane 0 Center Wavelength (λC0)	1264.50	-	1277.50	nm
Lane 1 Center Wavelength (λC1)	1284.50	-	1297.50	nm
Lane 2 Center Wavelength (λC2)	1304.50	-	1317.50	nm
Lane 3 Center Wavelength (λC3)	1324.50	-	1337.50	nm
Average Receive Power per Lane (PAVG)	2.5	-	-11.5	dBm
Unstressed Receive Sensitivity OMA per Lane	-	-	-10	dBm
Stressed Receive Sensitivity OMA per Lane	-	-	-7.3	dB
Optical Return Loss (ORL)	-	-	-26	dB

QSFP28-LR4

Detailed Specifications

Parameter	Minimum	Typical	Maximum	Unit
Storage Temperature (Ts)	-40	-	85	°C
Operating Case Temperature CTemp (Tc)	0	-	70	°C
Wattage	-	-	3.6729	W
Power Supply Voltage (Vcc)	3.315	3.3	3.465	V
Power Supply Current (Icc)	-	-	1360	mA

Transmitter

Parameter	Minimum	Typical	Maximum	Unit
Lane 0 Center Wavelength (λC0)	1294.53	1295.56	1296.59	nm
Lane 1 Center Wavelength (λC1)	1299.02	1300.05	1301.09	nm
Lane 2 Center Wavelength (λC2)	1303.54	1304.58	1305.63	nm
Lane 3 Center Wavelength (λC3)	1308.09	1309.14	1310.19	nm
Data Rate, per Lane	-	25.78	-	Gbps
Total Average Launch Power (PT)	-	-	10.5	dBm
Average Output Power per Lane (PAVG)	-4.3	-	4.5	dBm
Extinction Ratio (ER)	4	-	-	dB
Side Mode Suppression Ratio (SMSR)	30	-	-	dB
Optical Modulation Amplitude (POMA)	-1.3	-	4.5	dBm
Optical Return Loss Tolerance	-	-	20	dB

Receiver

Parameter	Minimum	Typical	Maximum	Unit
Lane 0 Center Wavelength (λC0)	1294.53	1295.56	1296.59	nm
Lane 1 Center Wavelength (λC1)	1299.02	1300.05	1301.09	nm
Lane 2 Center Wavelength (λC2)	1303.54	1304.58	1305.63	nm
Lane 3 Center Wavelength (λC3)	1308.09	1309.14	1310.19	nm
Average Receive Power per Lane (PAVG)	4.5	-	4.5	dBm
Receive Sensitivity per Lane in OMA (Pmin)	-	-	-8.6	dBm
Optical Return Loss (ORL)	-	-	-26	dB

QSFP28-LR4 (OTU4 Operation)

Detailed Specifications⁴

*Note 4: The Electrical Characteristics and other Detailed Specs Match the LR4

Transmitter

Parameter	Minimum	Typical	Maximum	Unit
Lane 0 Center Wavelength (λ_{C0})	1294.53	1295.56	1296.59	nm
Lane 1 Center Wavelength (λ_{C1})	1299.02	1300.05	1301.09	nm
Lane 2 Center Wavelength (λ_{C2})	1303.54	1304.58	1305.63	nm
Lane 3 Center Wavelength (λ_{C3})	1308.09	1309.14	1310.19	nm
Data Rate, per Lane	-	27.95	-	Gbps
Total Average Launch Power (PT)	-	-	10.5	dBm
Average Output Power per Lane (PAVG)	-2.5	-	2.9	dBm
Extinction Ratio (ER)	7	-	-	dB
Side Mode Suppression Ratio (SMSR)	30	-	-	dB
Optical Return Loss Tolerance	-	-	20	dB

Receiver

Parameter	Minimum	Typical	Maximum	Unit
Lane 0 Center Wavelength (λ_{C0})	1294.53	1295.56	1296.59	nm
Lane 1 Center Wavelength (λ_{C1})	1299.02	1300.05	1301.09	nm
Lane 2 Center Wavelength (λ_{C2})	1303.54	1304.58	1305.63	nm
Lane 3 Center Wavelength (λ_{C3})	1308.09	1309.14	1310.19	nm
Average Receive Power per Lane (PAVG)	2.9	-	-	dBm
Receive Sensitivity per Lane in OMA (Pmin)	-	-	-10.3	dBm
Optical Return Loss (ORL)	-	-	-26	dB

QSFP28-ER4L

Detailed Specifications

Parameter	Minimum	Typical	Maximum	Unit
Storage Temperature (Ts)	-40	-	85	°C
Operating Case Temperature CTemp (Tc)	0	-	70	°C
Wattage	-	-	5	W
Power Supply Voltage (Vcc)	3.315	3.3	3.465	V
Power Supply Current (Icc)	-	-	1443	mA

Transmitter

Parameter	Minimum	Typical	Maximum	Unit
Lane 0 Center Wavelength (λ_{C0})	1294.53	1295.56	1296.59	nm
Lane 1 Center Wavelength (λ_{C1})	1299.02	1300.05	1301.09	nm
Lane 2 Center Wavelength (λ_{C2})	1303.54	1304.58	1305.63	nm
Lane 3 Center Wavelength (λ_{C3})	1308.09	1309.14	1310.19	nm
Data Rate, per Lane	-	25.78	-	Gbps
Total Average Launch Power (PT)	-	-	12.5	dBm
Average Output Power per Lane (PAVG)	-2.5	-	6.5	dBm
Extinction Ratio (ER)	4.5	-	-	dB
Side Mode Suppression Ratio (SMSR)	30	-	-	dB
Optical Return Loss Tolerance	-	-	20	dB

Receiver

Parameter	Minimum	Typical	Maximum	Unit
Lane 0 Center Wavelength (λ_{C0})	1294.53	1295.56	1296.59	nm
Lane 1 Center Wavelength (λ_{C1})	1299.02	1300.05	1301.09	nm
Lane 2 Center Wavelength (λ_{C2})	1303.54	1304.58	1305.63	nm
Lane 3 Center Wavelength (λ_{C3})	1308.09	1309.14	1310.19	nm
Receive Overload (P _{MAX})	-3.5	-	-	dBm
Receive Sensitivity(P _{MIN})	-	-	-18.5	dBm

Our Mission

Our mission is to ensure that our customers turn up services faster, build out the fiber networks they need to be competitive, and keep them up and running.

Our Process and Commitment to Uptime



Integra Optics is leading the way in uptime. We're innovating the transceiver manufacturing process for more reliable optics and increased availability, from product concept to customer service. We back all of our transceivers with a limited lifetime warranty, and we have designed our process to get the very best transceivers to our customers faster than ever before.

- **Designed for interoperability:** Integra brand transceivers designed and programmed to be 100% interoperable with OEM platform hardware and fully comply with OEM equipment warranties
- **Automated production:** Automated production process in our US facility, using the first high-speed robots in the Western Hemisphere for coding and testing transceivers
- **Accurate coding:** Every transceiver is correctly coded and tested 100% of the time, resulting in optics that are 33 times more reliable than both OEM and third party generics
- **On-demand availability:** We maintain the largest inventory of transceivers in the Western Hemisphere to fill transceiver orders in days rather than the weeks or months, and help customers manage their supply chains.
- **24-hour support:** Experienced customer support team, available 24-hours a day, for technical support and equipment orders
- **A responsive organization:** Unmatched customer service, next-day shipping and even private aircraft to respond to our customers' needs
- **Experienced engineers:** Vast industry experience to help troubleshoot problems, consult on network design solutions and help with turn up
- **ISO Certified:** We hold the ISO 9001:2015 Quality Management System Certification for our dedication to quality in every step of our processes

Additional Information

For more information about Integra Optics' QSFP28 please contact a sales representative at sales@integraoptics.com or visit integraoptics.com